

# FDS700

## Floor Stand Digital Signage

21.5inch~75inch Floor Stand Digital Signage



### Key Features

- ◆ 21.5"~75" TFT LCD display
- ◆ 250~3500nits Brightness By Request
- ◆ 16:9 Ratio
- ◆ Wall Mounted, Vesa

### Display Parameters

LCD Size	21.5" ~75" TFT (LED Backlight)
Resolution	1920*1080/3840*2160
Brightness	250~3500cd/m <sup>2</sup> By Request
Aspect ratio	16:9
Life Time	50,000hrs
Contrast Ratio	(1200:1)
Response Time	3.5ms
Viewing Angle	170/160(U/D), 178/170(L/R)
Color Resolution	16.7M

### IO Interface

DC	DC 12V
USB	By Request
COM	By Request
VGA	By Request
DVI	By Request
HD MI	By Request

### Power Supply

Power Supply	110~240V AC Power Input
Power Consumption	<200W
Other Voltage	By Request

### Installation

Embedded	Floorstand
----------	------------


### Environments

Operating Temp	-10°C~60°C
----------------	------------

Storage Temp	-30°C~80°C
Relative Humidity	5~95%@10°C (Non-condensing)
EMC	CE/FCC Class A

## Enclosure

Housing Material	Aluminum +Galvanized Sheet
------------------	----------------------------

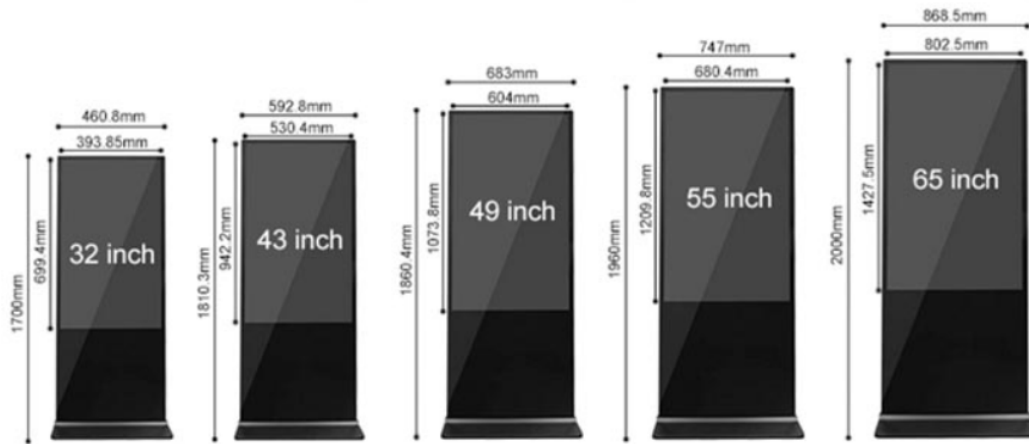

### Exterior Size:

32"-----	1700x460x50mm
43"-----	1810x592x50mm
49"-----	1860x683x50mm
55"-----	1960x747x50mm
65"-----	2000x868x50mm

### Display Size:

699.4mm (H) X 393.85mm (V)
942.2mm (H) x 530.4mm (V)
1073.8mm (H) x 604mm (V)
1209.8mm (H) x 680.4mm (V)
1427.5mm (H) x 802.5mm (V)